



Model 450 Transporters



Save time and money by eliminating conveyor-related downtime, maintenance and repair.



P.O. Box 209, Port Royal, PA 17082
Tel: 717.527.2094 Fax: 717.527.2180
Email: info@vibroindustries.com
Web: www.vibroindustries.com

The Vibro Model 450 Air-Operated Transporter can move up to 125 lbs. of material effortlessly (operating at 35 PSI - 0.4 CFM), including linear scrap removal from machine tools and for other conveying processes. The Model 450 has a total capacity of 170 lbs., plus 60 lbs of tray weight. Plus, multiple trays can be mounted on a single unit, replacing several conventional belt conveyors. The compact design of the Vibro Transporter allows installation in tight areas.

Specifications


	Model 450
Air Pressure Range	35 - 80
Air Consumption (CFM)	60 psi - 1.9 35 psi - 0.4
Feed Rate (feet/minute)	15 - 40
Sound Level (db-A)	64
Maximum Load	125 lbs.
Max. Weight of Tray	60 lbs.
Transporter Weight	30 lbs.

Vibro Features Include:


- Two Year Warranty
- 100% Air Operated (no mechanical springs)
- Low Air Consumption
- Variable Speed (12-40 ft./min.)
- Available from Stock
- 100% American Made

Optional Features Include:

- A Cover Guard for harsh environments
- Quick Clamps for fast tray removal
- Adjustable Bearing Support for trays
- A Motion Sensor that automatically shuts down machinery if the air supply is ever interrupted

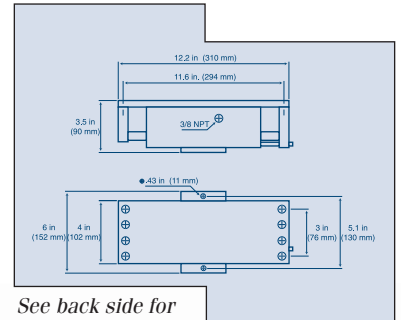

See back side for dimensional drawing

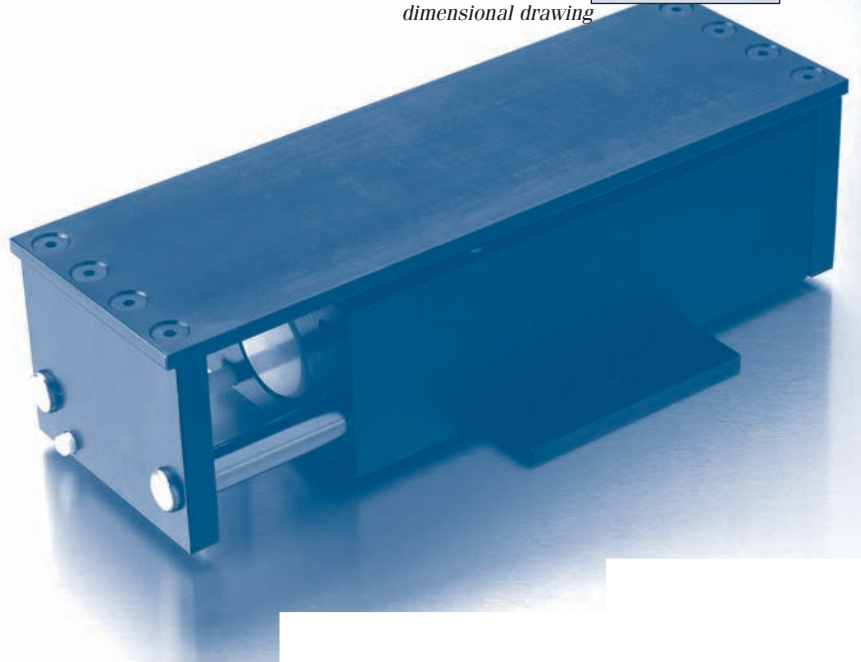


Global Distribution



UPTON & SULLIVAN Co., LTD
Canada



Model 450 Transporters

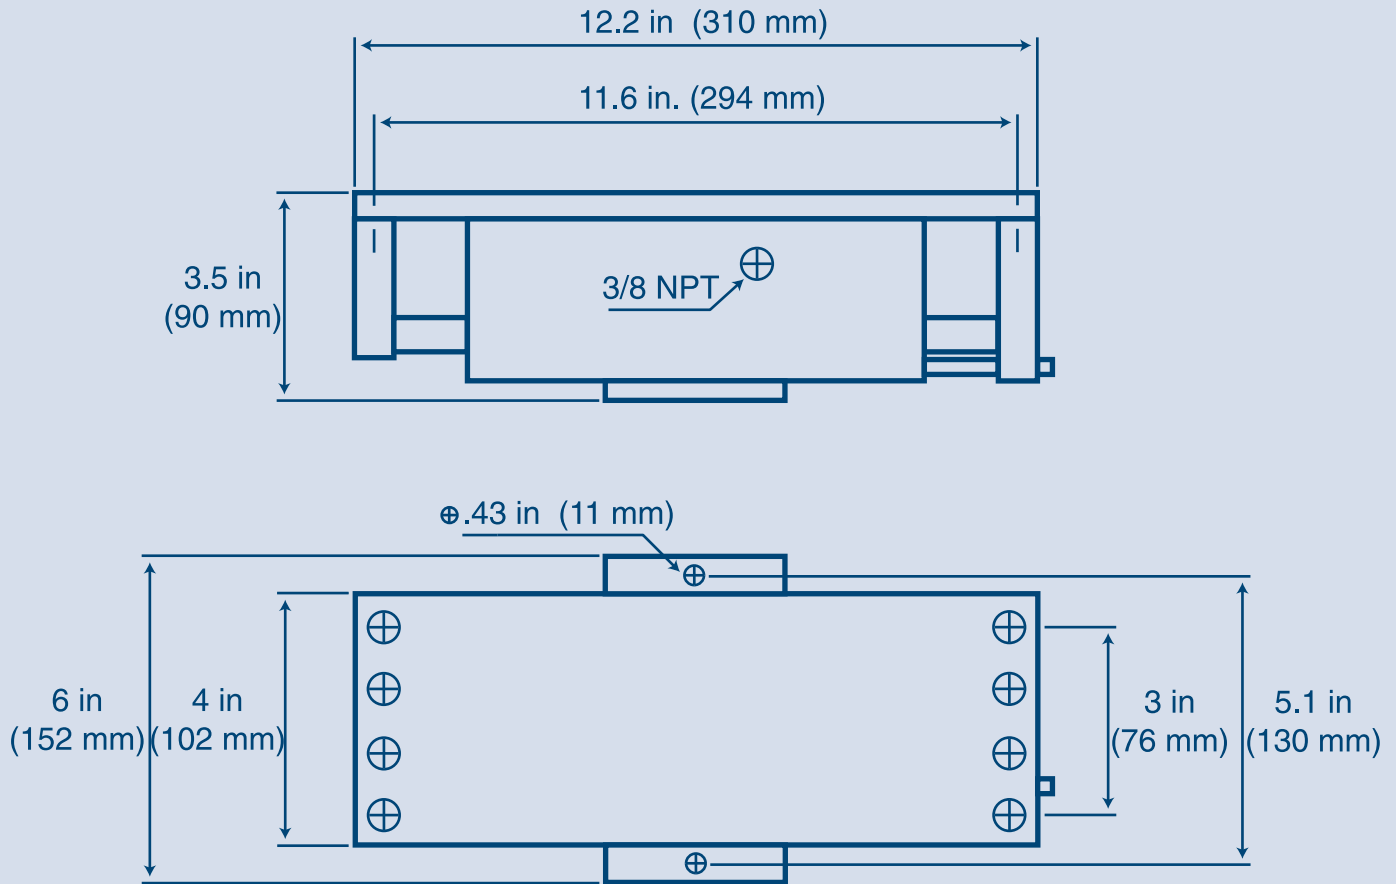

P.O. Box 209, Port Royal, PA 17082
Tel: 717.527.2094 Fax: 717.527.2180
Email: info@vibroindustries.com
Web: www.vibroindustries.com