



## Model 450 Transporters



*Save time and  
money by eliminating  
conveyor-related downtime,  
maintenance and repair.*



P.O. Box 209, Port Royal, PA 17082  
Tel: 717.527.2094 Fax: 717.527.2180  
Email: [info@vibroindustries.com](mailto:info@vibroindustries.com)  
Web: [www.vibroindustries.com](http://www.vibroindustries.com)

The Vibro Model 450 Air-Operated Transporter can move up to 125 lbs. of material effortlessly (operating at 35 PSI - 0.4 CFM), including linear scrap removal from machine tools and for other conveying processes. The Model 450 has a total capacity of 170 lbs., plus 60 lbs of tray weight. Plus, multiple trays can be mounted on a single unit, replacing several conventional belt conveyors. The compact design of the Vibro Transporter allows installation in tight areas.

### Specifications



	Model 450
Air Pressure Range	35 - 80
Air Consumption (CFM)	60 psi - 1.9 35 psi - 0.4
Feed Rate (feet/minute)	15 - 40
Sound Level (db-A)	64
Maximum Load	125 lbs.
Max. Weight of Tray	60 lbs.
Transporter Weight	30 lbs.

### Vibro Features Include:

- Two Year Warranty
- 100% Air Operated (no mechanical springs)
- Low Air Consumption
- Variable Speed (12-40 ft./min.)
- Available from Stock
- 100% American Made

### Optional Features Include:

- A Cover Guard for harsh environments
- Quick Clamps for fast tray removal
- Adjustable Bearing Support for trays
- A Motion Sensor that automatically shuts down machinery if the air supply is ever interrupted

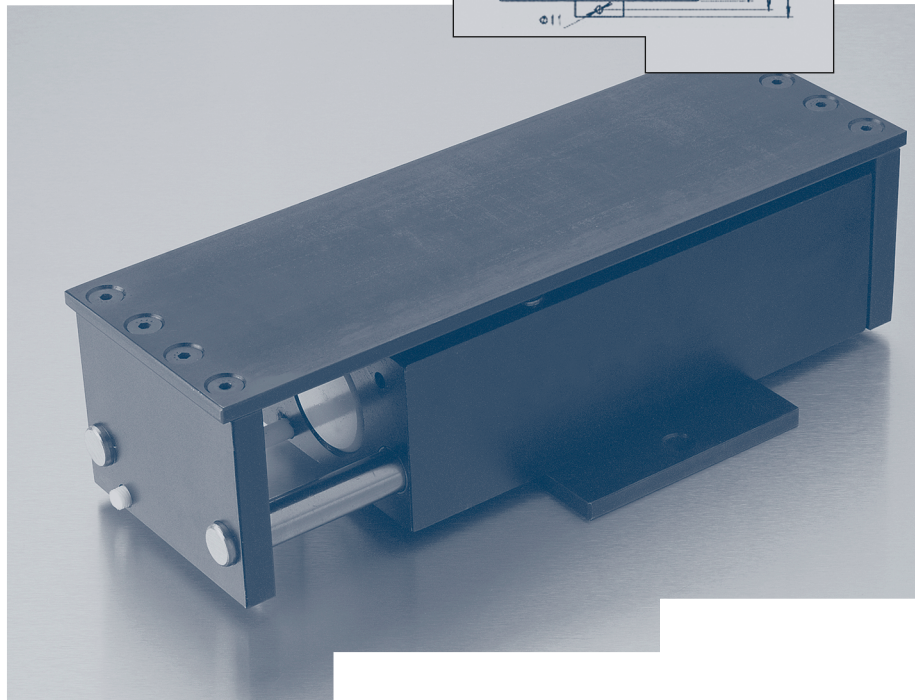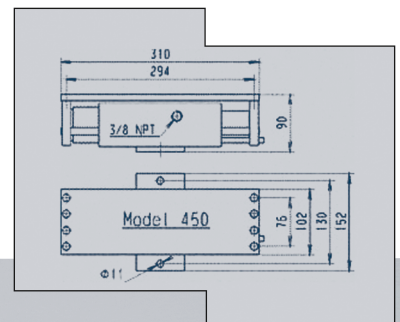

Global Distribution

**FOSMO MASKIN A.S.**  
Oslo, Norway

**UPTON & SULLIVAN Co., LTD**  
Canada